




SPORTS FLOORING



WOOD FINISH

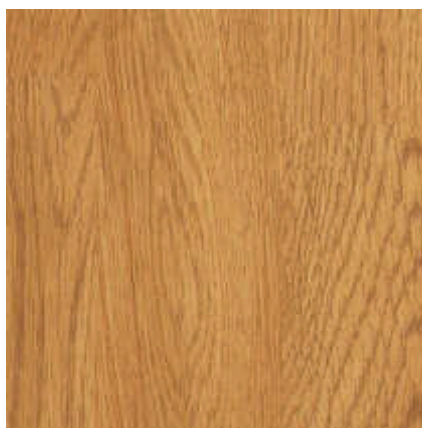


OAK



ASF - 1323

MAPLE

ASF - 1323

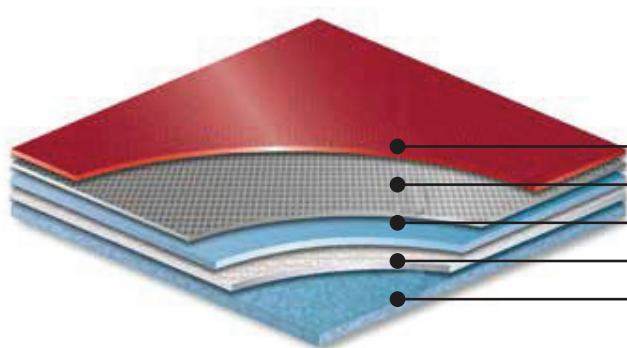

- Surface Dispose Layer (Anti Skid)
- Glass Fiber Layer
- Hermetic Stable Layer
- Three Layered Closed Cell Foam
- High Density Dual Colour Sealed Foam Shock Absorber





SPORTS FLOORING



Dimensions : 4.5 mm x 1.8 mtr x 15/20 mtr
Roll Pack : 27 m²/36 m²

SOLID




ORANGE

ASF - 6134



RED

ASF - 6180

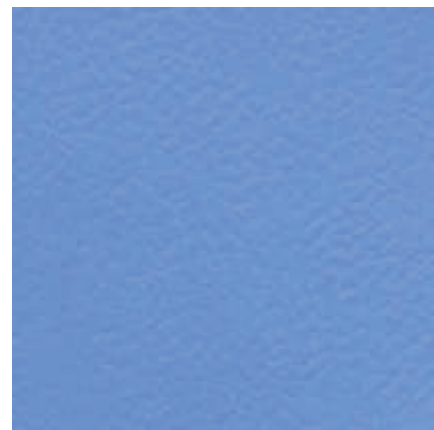

BLUE

ASF - 6445




LIGHT GREEN

ASF - 6535



GREEN

ASF - 6570

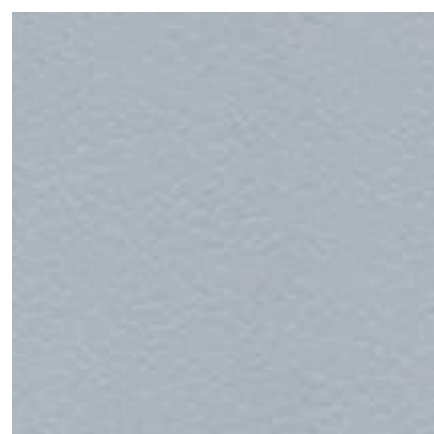

GREY

ASF - 6758



YELLOW

ASF - 6211



DARK BLUE

ASF - 6430



LIME GREEN

ASF - 6200

SPORTS FLOORING

DESCRIPTION	TEST METHOD	UNIT	TABLE TENNIS BADMINTON / TENNIS	MULTI-FUNCTION SERIES WOOD SERIES
Roll Length	En-426	MTRS	15/20	15/20
Roll Width	En-426	MTRS	1.8	1.8
Total Thickness*	En-428	mm	4.5	4.5
Top Layer	En-429	mm	1.2	0.7
Weight	En-429	Kgs/m2	3.33	3.33
Surface Treatment	Stain Resistance		UV Treatment, Easy Maintenance	
Impact Resistance	DIN 18032	N/M	>8	
Abrasion Resistance	mm	<10	7	
Indentation Resistance	EN1516	mm	<0.60	
Sound Insulation	ENISO717-2	DB	25-30	
Rebound Coefficient	GB/T 14833-1933	>.85	0.86	

*OTHER THICKNESS ALSO AVAILABLE ON REQUEST

IMPORTANT NOTE

It is highly recommended to have zero leveled sub-floor for installation of sports flooring products.
Please use [LEVEL O](#)® self-leveling compound to level the sub-floor.