

indiana SPORTS

OUTDOOR & INDOOR SPORTS



OUTDOOR &
INDOOR
SPORTS




We at Indiana are dedicated to answering your flooring needs. Established in 1999 and having over 20 years of expertise in all facets of flooring has pegged us as a front runner in the industry. Since its inception, our company's main emphasis has always been on attention to detail at ALL times. This approach coupled with a willingness to listen and help our clients achieve their targets. This has ensured us steady growth in our business over the years.

We source our products from the leading manufacturers across the Globe, who have developed the products under stringent conditions to offer exemplary finish, innovative designs, range of colors to choose from. Our products come in the most affordable price range and adequately cater to any requirements of our clients.

We specialize in laminate floors, Engineered floors, solid wood floors, outdoor deck flooring, PVC vinyl floors, ESD, anti static flooring, clean room, healthcare flooring, acoustic flooring sports etc for various commercial and residential purposes. We are also renowned importers of Gerflor Vinyl flooring FRANCE SINCE 1999.

Commercial or residential, we pride ourselves on the quality of our FLOORING work, exceptional value for money and getting the job done to agreed time.

Company Background

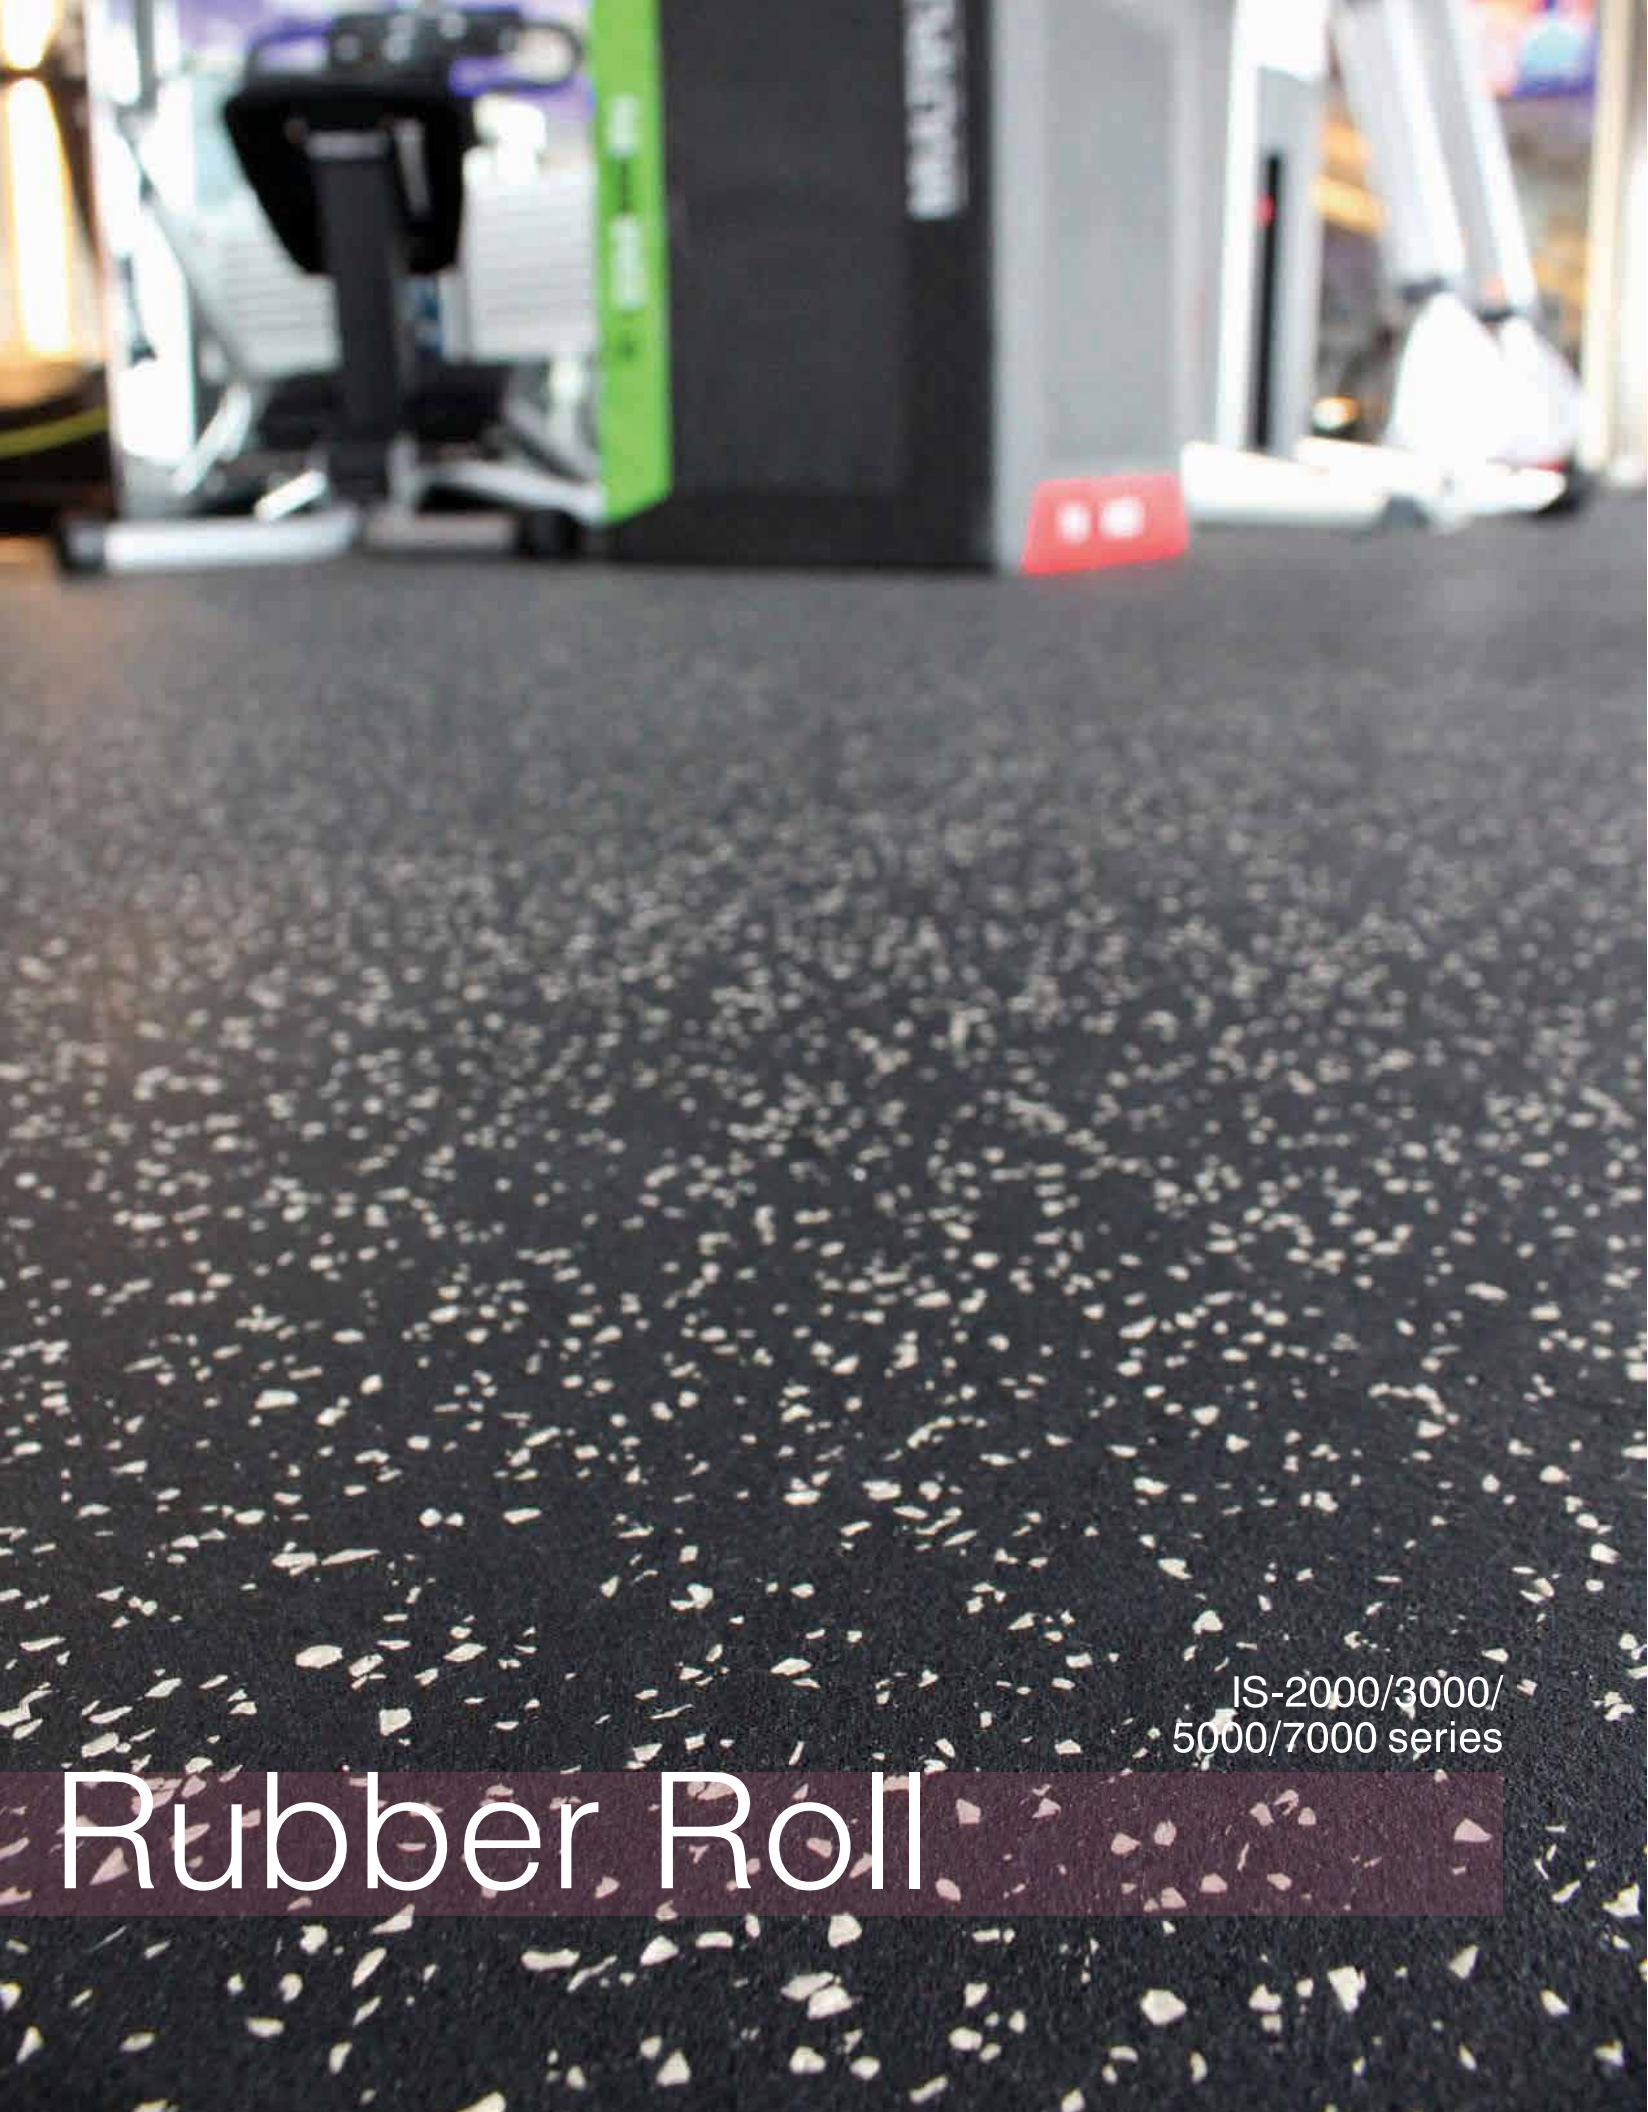

Rubber Roll



IS-2000/3000/
5000/7000 series

IS-2000/3000/5000/7000 series offers excellent underfoot comfort, absorbs walking noise and the shock of training impact. Being made of recycled tire rubber and synthetic EPDM, it is durable and resilient enough to fit for the heavy use in gym room and commercial places. It's supplied in both roll and interlocking, with various colors available.

Rubber Roll

IS-2000/3000/
5000/7000 series


Commercial & Gym Flooring

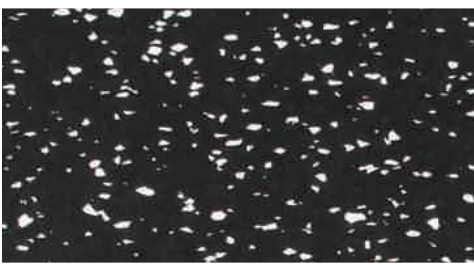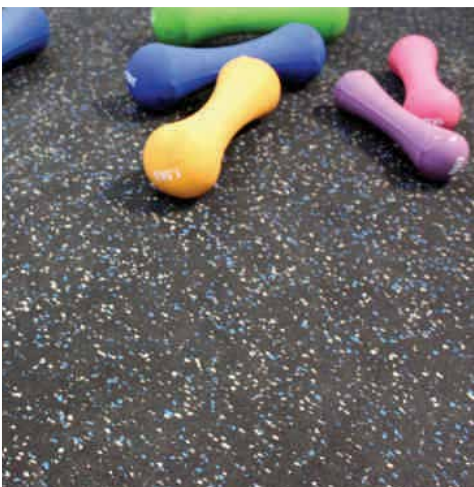

Applications	
– Gyms/clubs	– Changing rooms
– Walkways	– Ice rink
– Shopping malls	– Kindergarten
– Offices	– Exhibitions

Features & Benefits	
– Multi-functional applications	
– Wear resistant	
– Anti-slip	
– Sound and shock absorbent	
– Comfort underfoot	

Specifications	
Material: PU binder, Recycled tire rubber & Synthetic EPDM	
Color: Variety of colors	
Thickness: 4mm~12mm	
Roll Length: 10m/15mm/20mm	
Roll Width: 1m,1.25m	

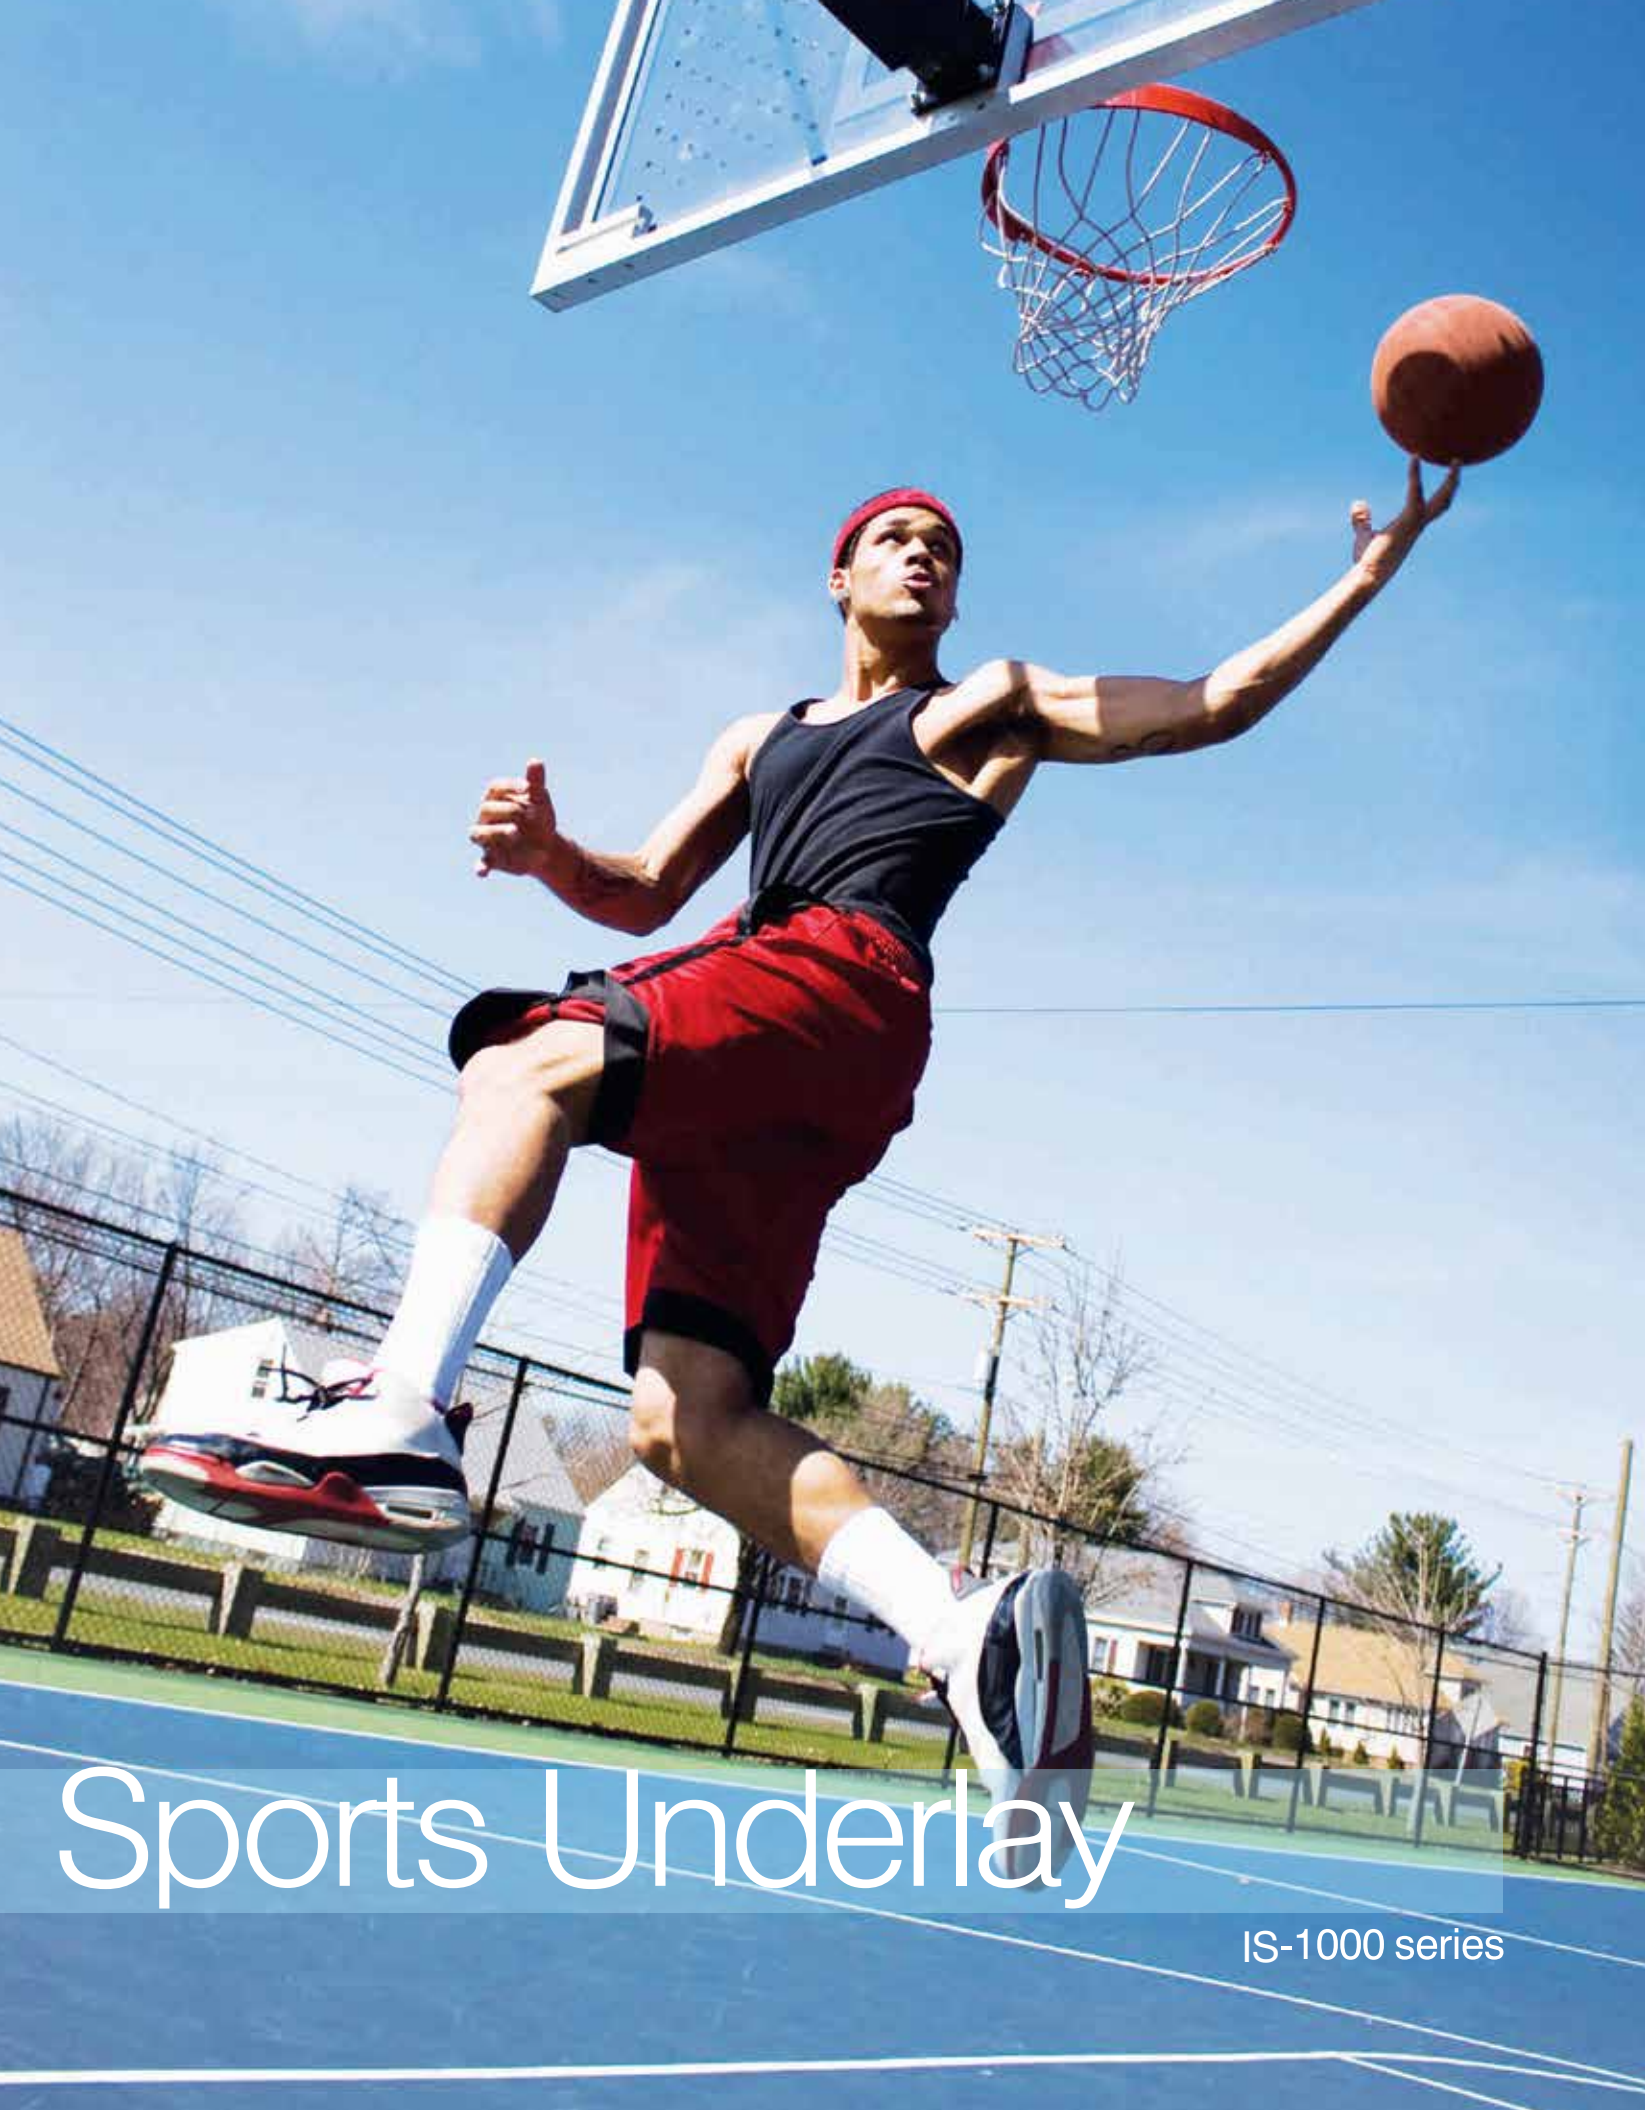

Sports Underlay

IS-1000 series

IS-1000 series has been specifically processed as a support underlay for multi-use sports court, football, and artificial turfs. The underlays are supplied in rolls at various thicknesses.

Sports Underlay

IS-1000 series



Applications
- Indoor and outdoor sports courts - Running track - Artificial turfs - Buffering layer
Features & Benefits
- Available in 3 widths, to meet various site conditions - Weather resistant - Shock absorbent - Sound absorbent
Specifications
Material: PU binder & Recycled rubber Color: Black, mixed color Thickness: 3~15mm(800kg/m³); 6~20mm(550kg/m³,600kg/m³) Roll Length: 10/15/20mm Roll Width: 1m, 1.25m, 1.5m

Item No.	Material Composition	Density	Product Advantages	Applications
IS-1001	100% recycled rubber	800kg/m³	Excellent shock absorption	Underlay for sports court & running track
IS-1002	Recycled rubber & recycled EPDM (off-cuts from daily production)	800~850kg/m³	Low cost	Underlay for sports court Shock pad for floor levelling system
IS-1004	100% recycled rubber	600kg/m³	Excellent shock absorption Premium water permeability	Turfs shock pad
IS-1033	100% recycled rubber	550kg/m³		



Sports Surface

IS-8000 series


Designed for indoor & outdoor recreational surfaces, IS-8000 series provides high traction and comfort underfoot.

Facilities that have intensive ball sports, running & training would benefit from IS-8000 series.

Laminated from a base layer cushion (IS-1000 series) with a dense layer of compressed EPDM rubber, IS-8000 series can qualify the facility with easy installation and economic value.

Sports Surface

IS-8000 series

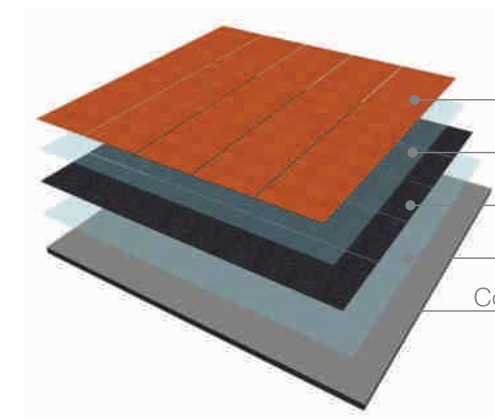

IS-8000 series

PU glue

IS-1000 series

PU glue

Concrete/Asphalt base

Applications


- Indoor and outdoor sports courts
- Running track
- Kindergarten
- Playground

Features & Benefits

- Multi-functional applications
- Wear resistant
- Anti-slip
- Comfort underfoot

Specifications

Material: PU binder & Synthetic EPDM
Color: Variety of colors
Thickness: 3~10mm
Roll Length: 10/15/20mm
Roll Width: 1m

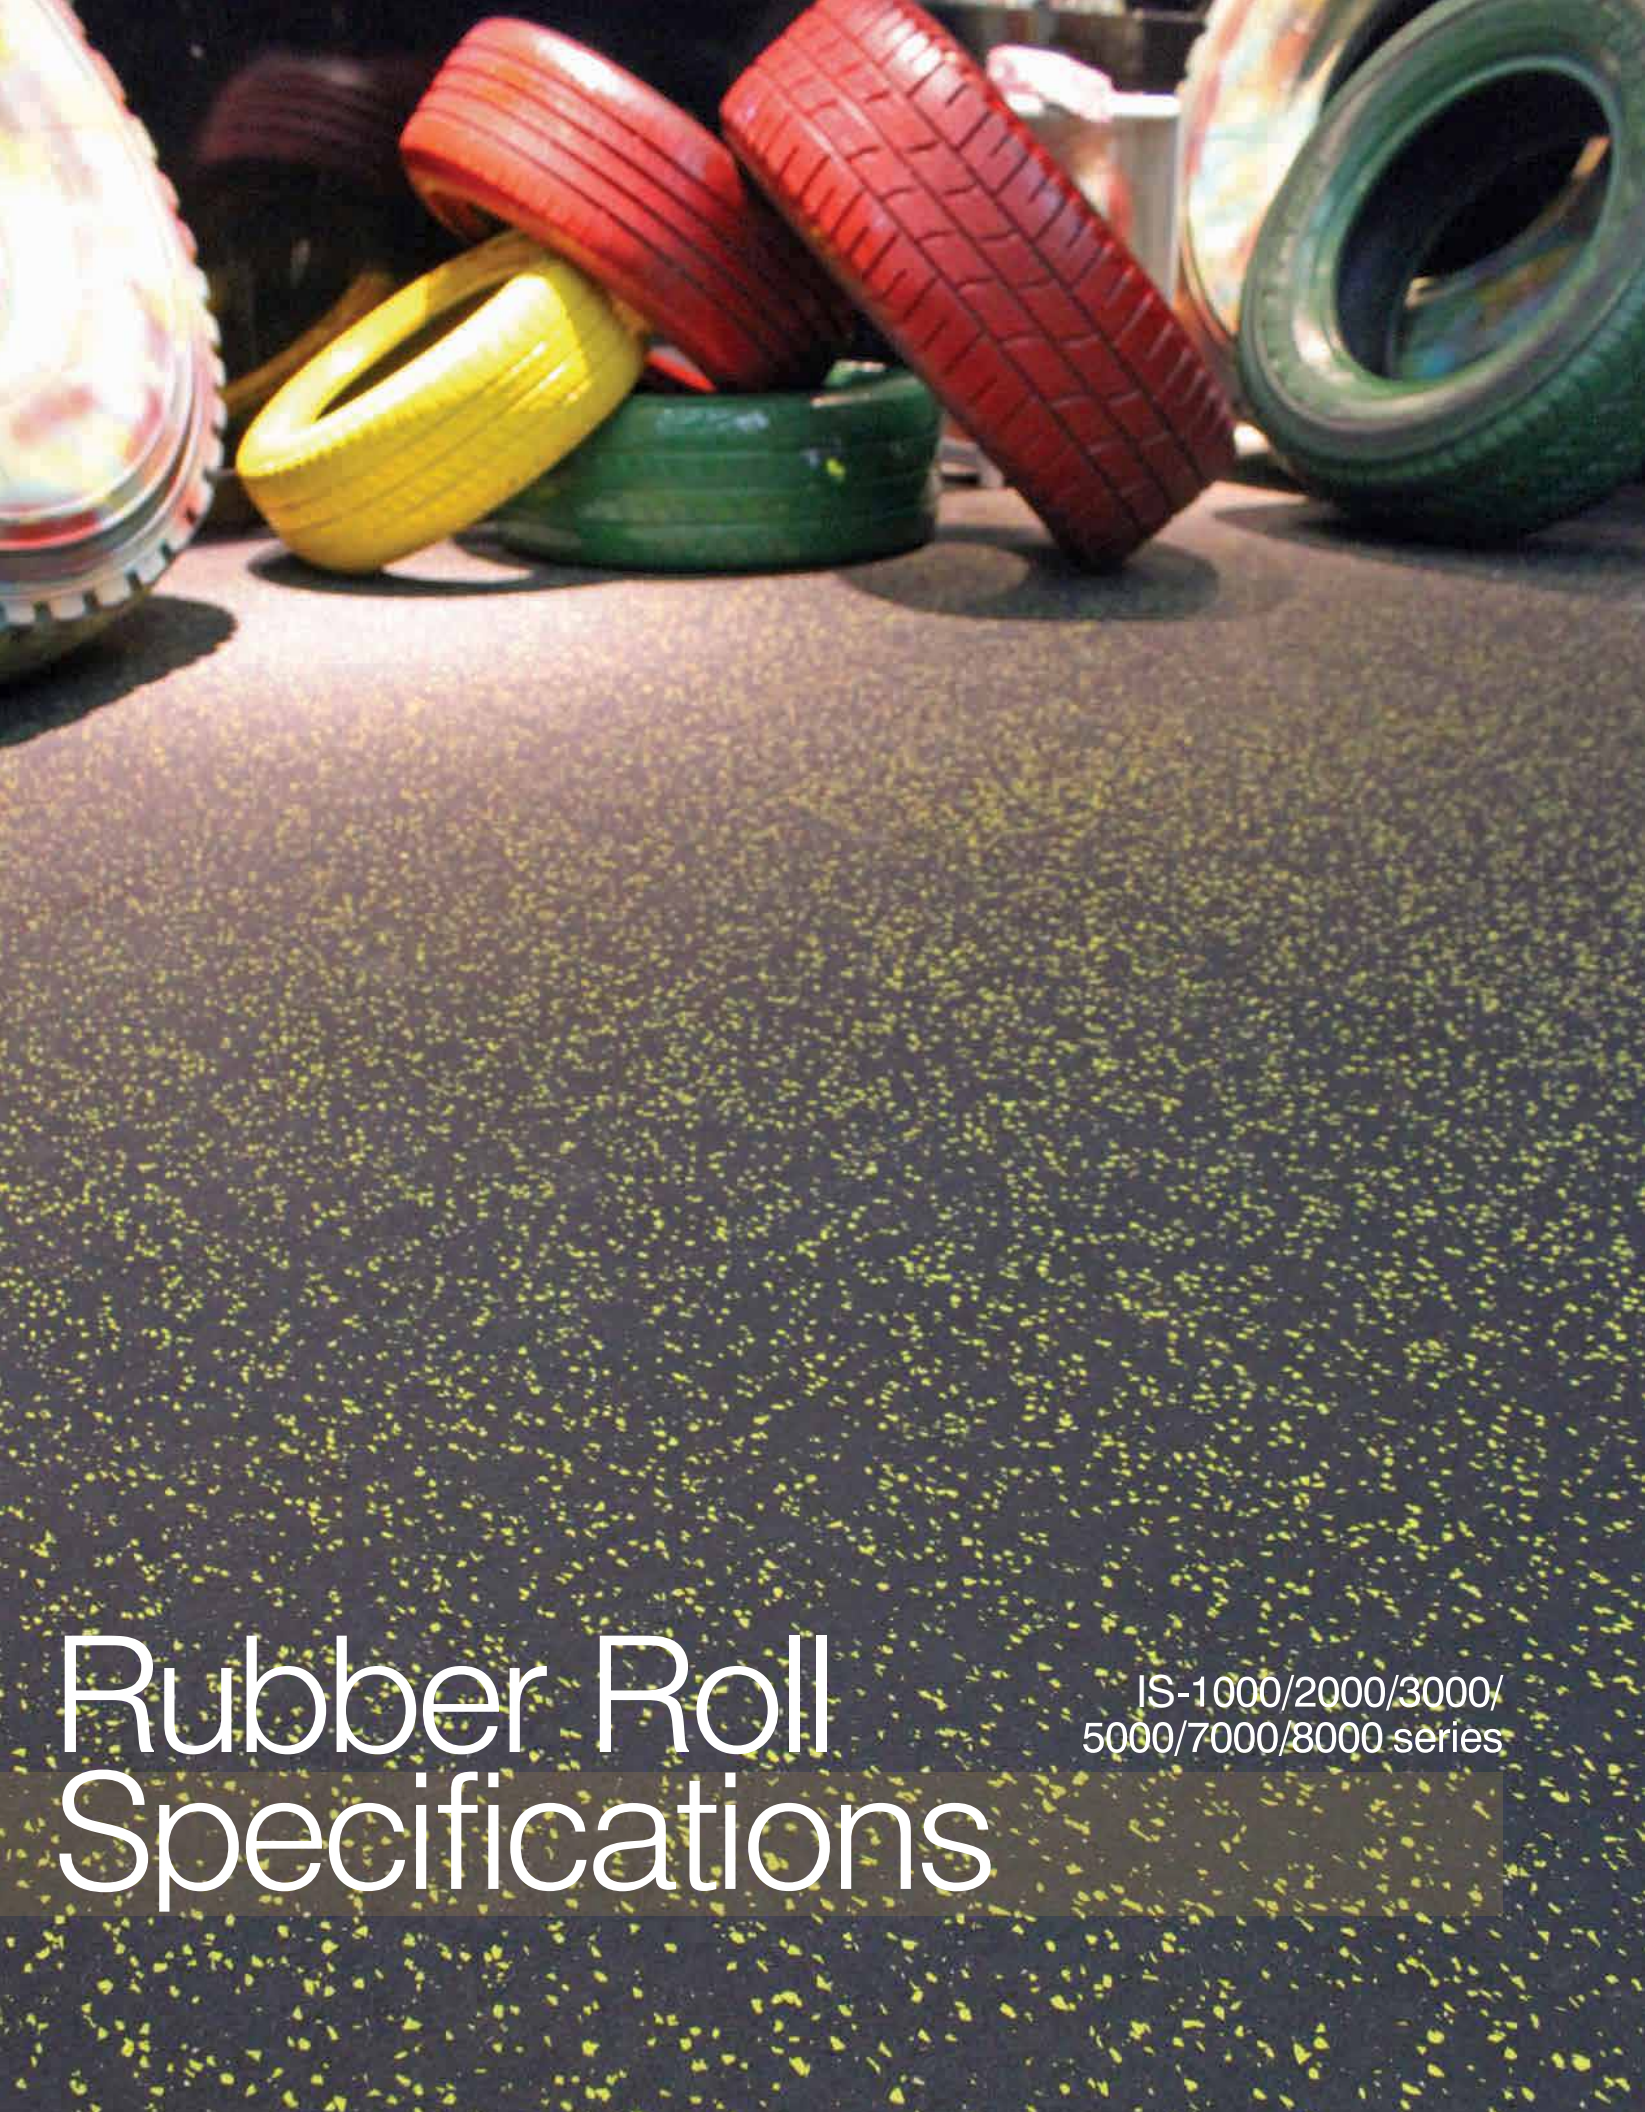

Rubber Roll Specifications


IS-1000/2000/3000/
5000/7000/8000 series

Rubber Roll Specifications

IS-1000/2000/3000/5000/7000/8000 series

Product Series			IS-1000 series	IS-2000 series	IS-3000 series	IS-5000 series	IS-7000 series	IS-8000 series
Material Composition	Thickness	Length	Recycled rubber /Foam rubber	15% EPDM 85% Recycled rubber	30% EPDM 70% Recycled rubber	50% EPDM 50% Recycled rubber	70% EPDM 30% Recycled rubber	100% EPDM
	3mm	20m	✓	✓	✓	✓	✓	✓
	4mm	20m	✓	✓	✓	✓	✓	✓
	5mm	10m	✓	✓	✓	✓	✓	✓
	6mm	10m	✓	✓	✓	✓	✓	✓
	7mm	10m	✓	✓	✓	✓	✓	✓
	8mm	10m	✓	✓	✓	✓	✓	✓
	9mm	10m	✓	✓	✓	✓	✓	✓
	10mm	10m	✓	✓	✓	✓	✓	✓
	11mm	10m	✓	✓	✓	✓		
	12mm	10m	✓	✓	✓	✓		
	13mm	10m	✓					
	14mm	10m	✓					
	15mm	10m	✓					
	16mm	10m	✓					
	17mm	10m	✓					
	18mm	10m	✓					
	19mm	10m	✓					
	20mm	10m	✓					

Width	1m	✓	✓	✓	✓	✓	✓
	1.25m	✓	✓	✓	✓		
	1.5m	✓					

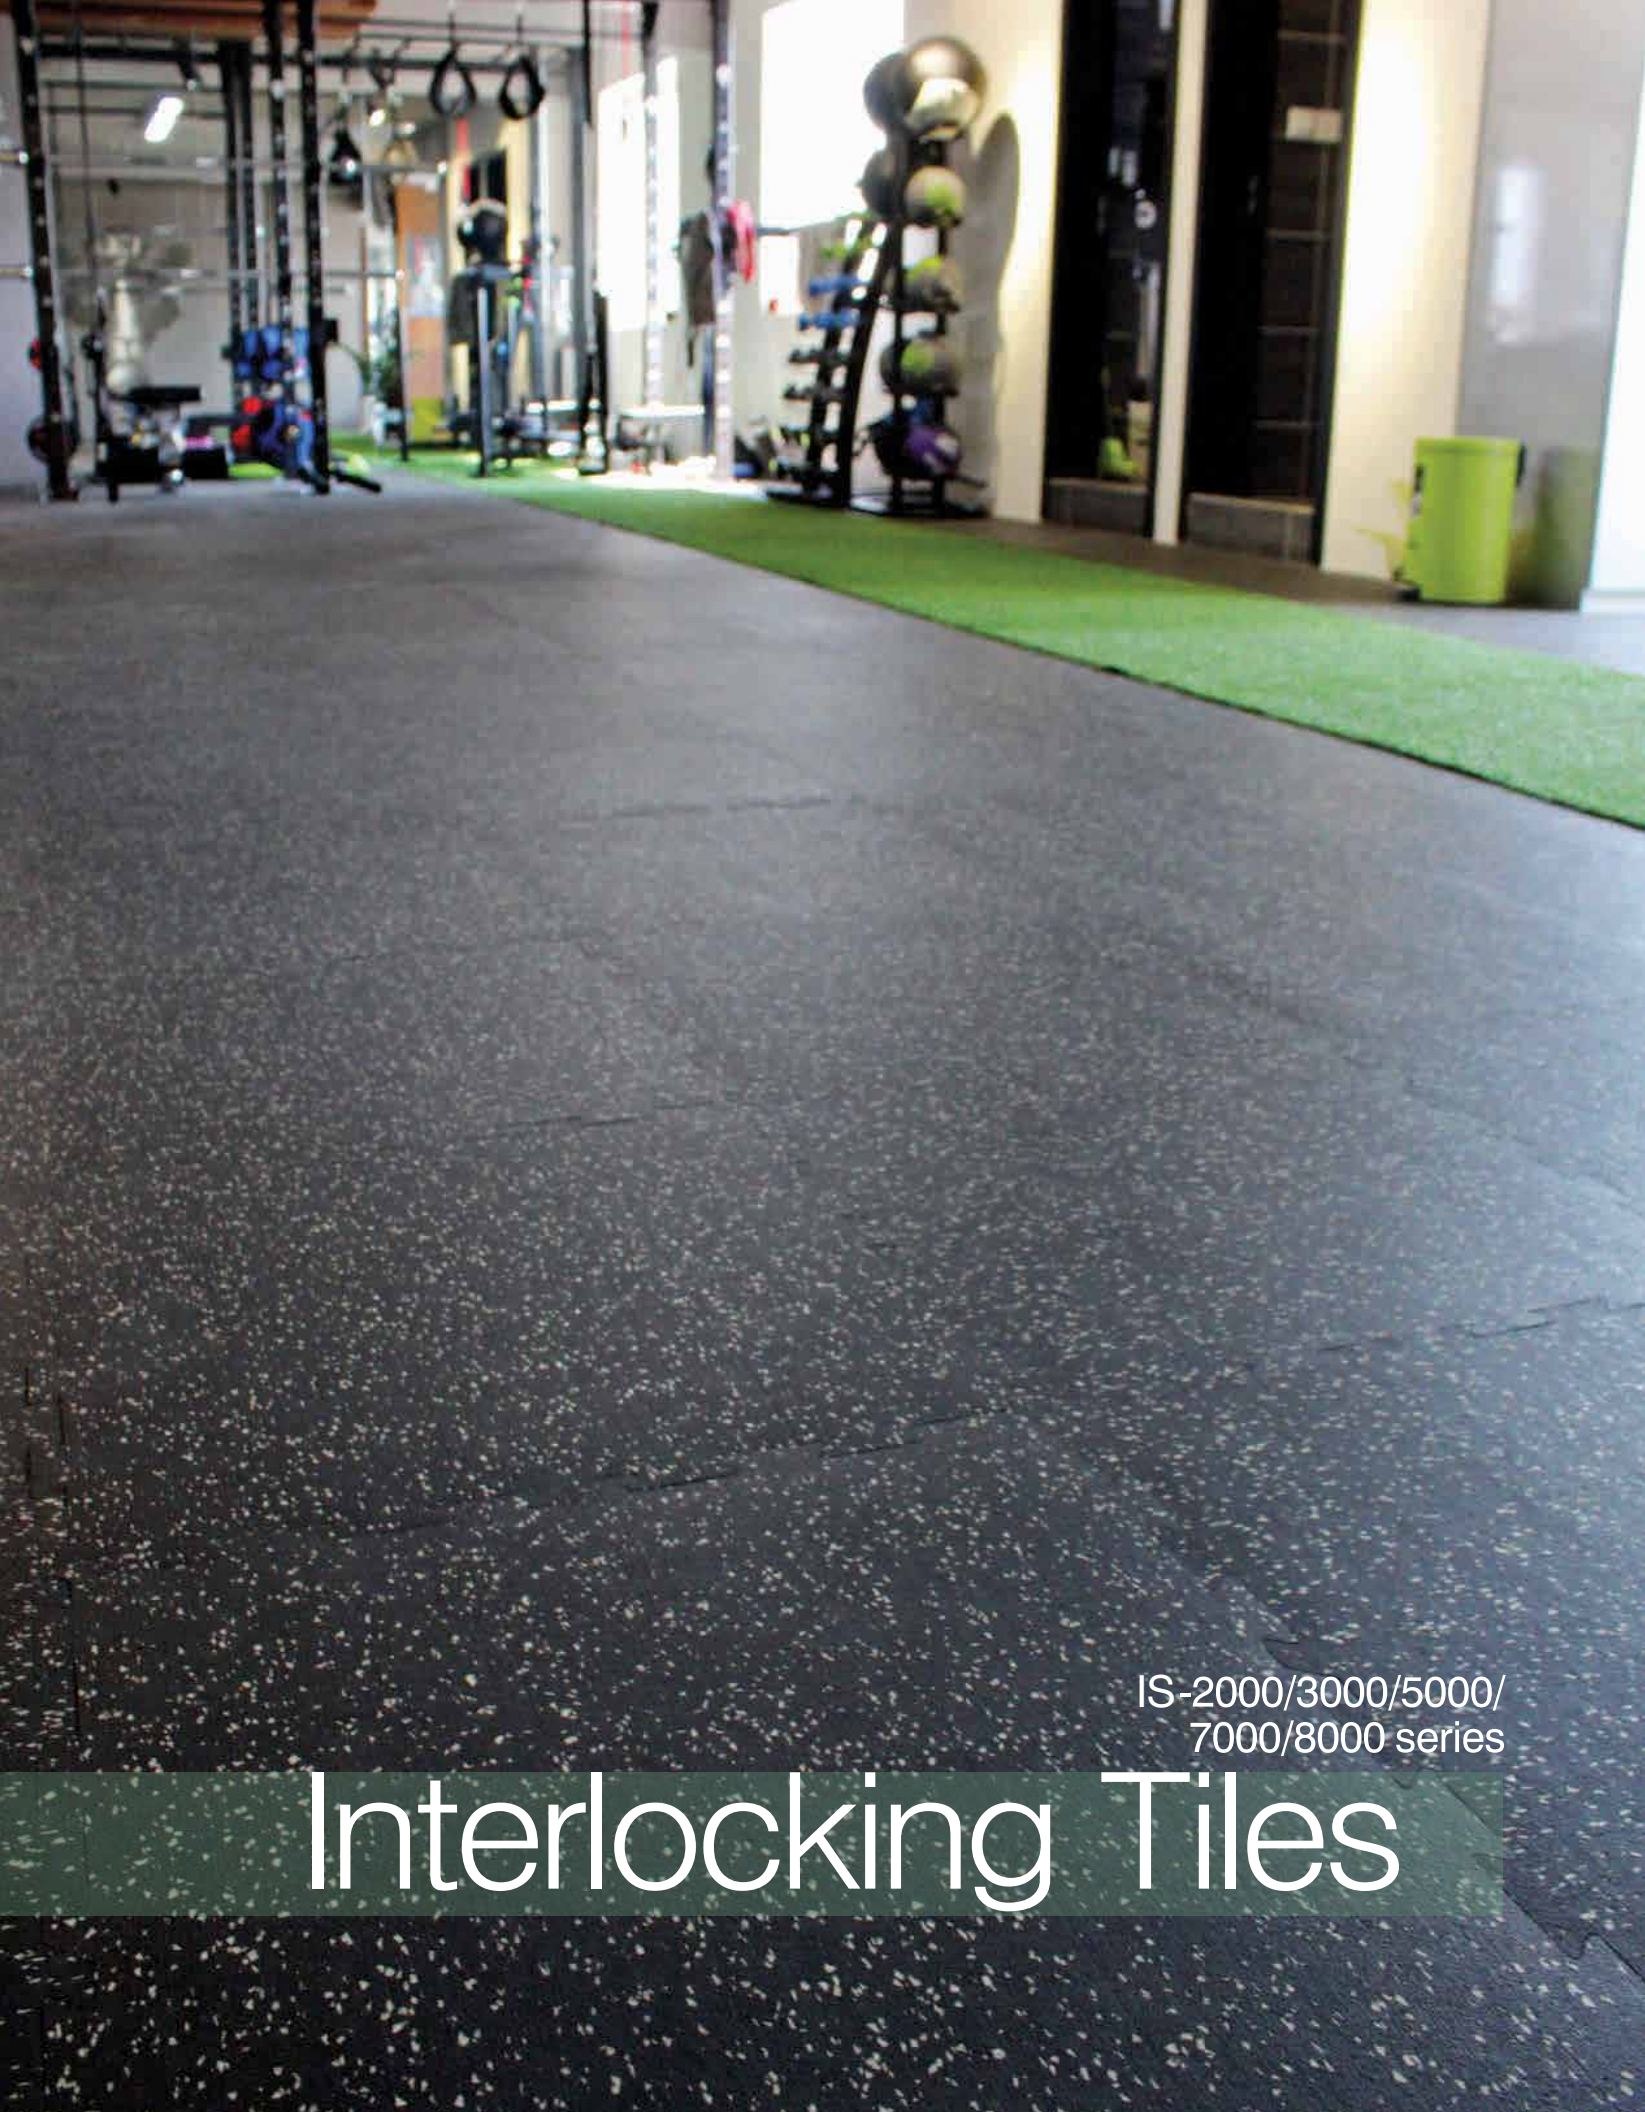

IS interlocking tiles are the perfect floor solution that is easy to install,tough and resilient enough for multiple applications.
They are made of recycled tire rubber and EPDM rubber.

Interlocking Tiles

IS-2000/3000/5000/
7000/8000 series




Applications	
– Gyms	– Kindergarten
– Schools	– Clubs
– Offices	– Recreation centers
– Retail stores	

Features & Benefits	
– Loose laid	
– Wear resistant	
– Slip resistant	
– Shock absorbent	
– Environmentally safety	

Specifications	
Material: PU binder, Recycled tire rubber & Synthetic EPDM	
Color: Variety of colors	

Rubber Interlocking Specifications

Product Series Thickness	IS-2000 Series IT	IS-3000 Series IT	IS-5000 Series IT	IS-7000 Series IT	IS-8000 Series IT
500*500mm / 610*610mm / 1000*1000mm					
4 mm					✓
5 mm	✓	✓	✓	✓	✓
6 mm	✓	✓	✓	✓	✓
7 mm	✓	✓	✓	✓	✓
8 mm	✓	✓	✓	✓	✓
9 mm	✓	✓	✓	✓	✓
10 mm	✓	✓	✓	✓	✓

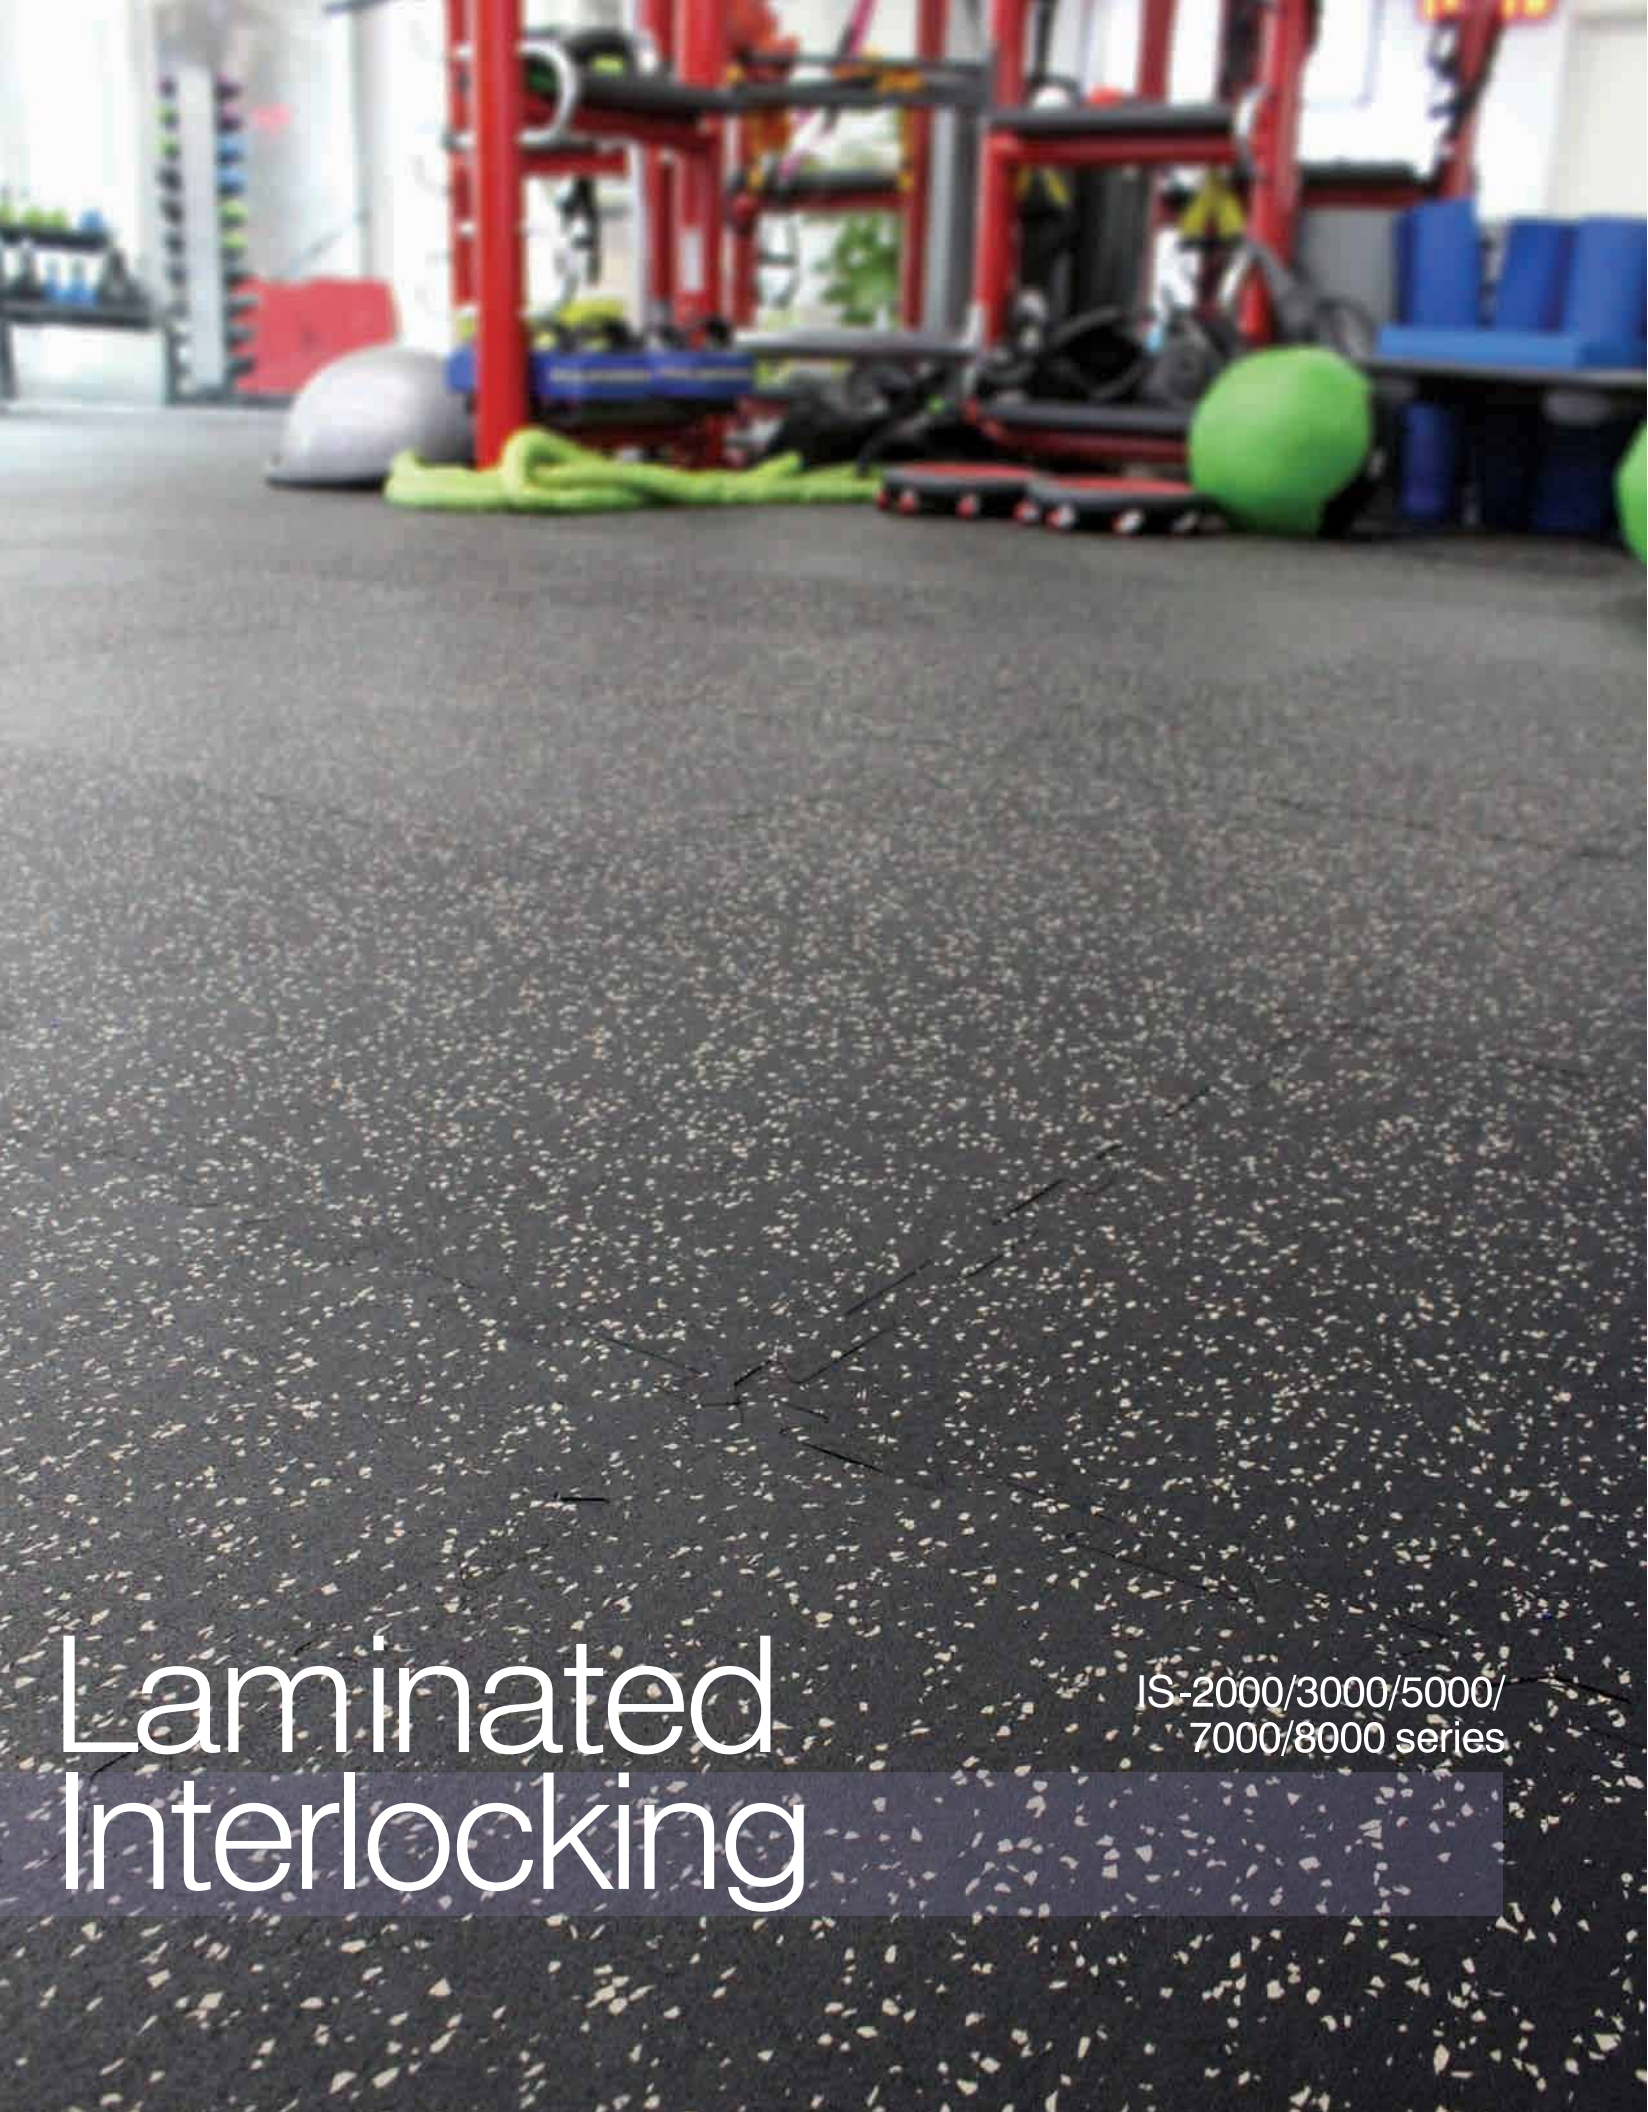


Laminated Interlocking

IS-2000/3000/5000/
7000/8000 series

Made with a two-piece construction (a durable recycled rubber top with a foam backing for anti-fatigue purposes), IS Laminated Interlocking definitely enhances shock absorption and offers much better underfoot comfort. The puzzle-cut system allows for flexibility and cost savings when tiles need to be replaced due to wear.

Laminated Interlocking

IS-2000/3000/5000/
7000/8000 series

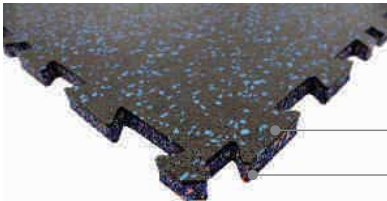

Top layer
Bottom layer




Applications	
– Gyms	– Workplace
– Offices	– Exhibition
– Retail stores	– Check-out stands
– Kindergarten	

Features & Benefits	
– Loose laid	– Anti-fatigue
– Wear resistant	– Comfortable underfoot
– Slip resistant	– Eco friendly
– Shock absorbent	– Easily maintained
– Sound absorbent	

Specifications
Material: PU binder, Recycled rubber & Synthetic EPDM, Foam rubber
Color: Variety of colors

Laminated Interlocking Specifications

Product Series Thickness	IS-2000 Series IT	IS-3000 Series IT	IS-5000 Series IT	IS-7000 Series IT	IS-8000 Series IT
500*500mm / 610*610mm / 1000*1000mm					
(3+5) mm	✓	✓	✓	✓	✓
(3+6) mm	✓	✓	✓	✓	✓
(3+7) mm	✓	✓	✓	✓	✓
(3+9) mm	✓	✓	✓	✓	✓
(3+12) mm	✓	✓	✓	✓	✓
(3+17) mm	✓	✓	✓	✓	✓
(3+22) mm	✓	✓	✓	✓	✓
(3+27) mm	✓	✓	✓	✓	✓

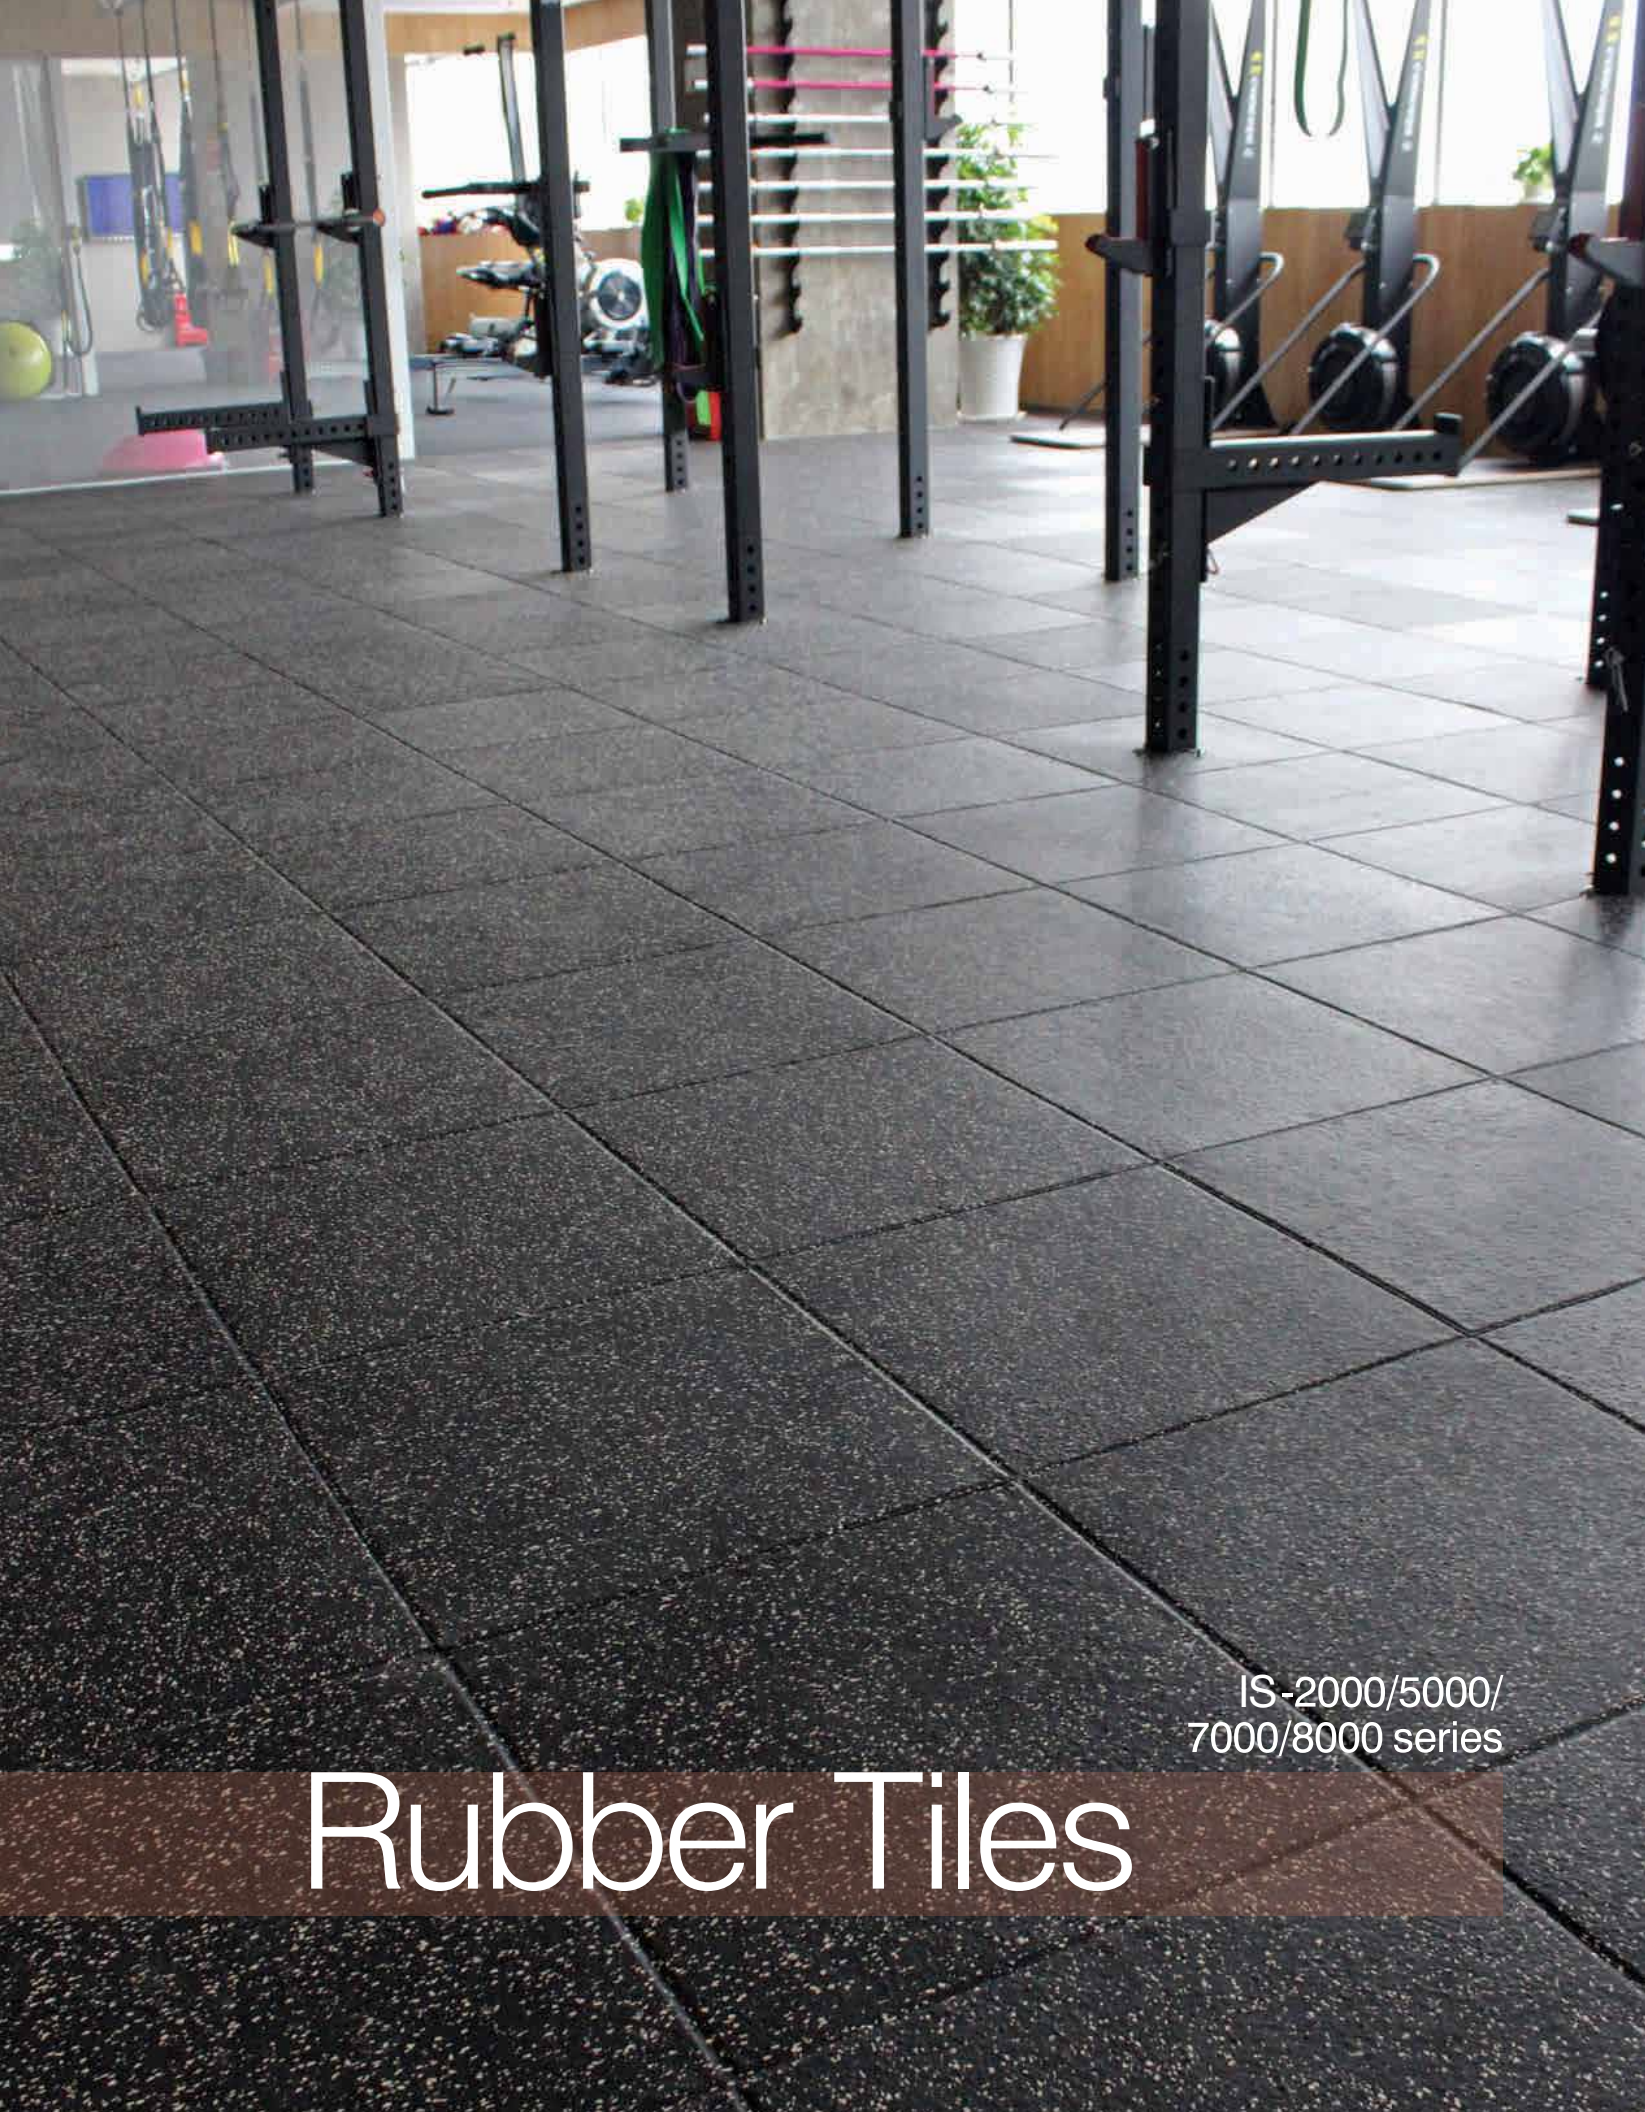

IS-2000/5000/
7000/8000 series

Rubber Tiles


IS Rubber Tiles are designed to attenuate the shock of people falling from a certain height and reduce the risk of injury. The material composition of recycled rubber and EPDM flecks makes them elastic, anti-slip and durable, fitting for both indoor and outdoor applications. They are your ideal choice for a safer surface in gyms, playground and kindergarten, benefit you with effective cost, and convenient installation with plastic connectors.

Rubber Tiles

IS-2000/5000/
7000/8000 series



Bottom layer



Plastic connector



Applications

- Gyms
- Playground
- Kindergarten

Features & Benefits

- Weather proof
- Wear resistant
- Slip resistant
- Shock absorbent
- Environmentally safety

Specifications

Material: PU binder, Recycled rubber & Synthetic EPDM
Color: Variety of colors
Tolerance: Width&Length $\pm 1.5\%$; Thickness $\pm 2\text{mm}$

Rubber Tiles Specifications

Product Series	IS-2000 Series M	IS-3000 Series M	IS-5000 Series M	IS-7000 Series M	IS-8000 Series M	Bottom Style
Thickness						
500*500mm / 1000*500mm						
20 mm	✓		✓	✓	✓	
25 mm	✓		✓	✓	✓	
30 mm	✓		✓	✓	✓	
35 mm	✓		✓	✓	✓	
40 mm	✓		✓	✓	✓	
45 mm	✓		✓	✓	✓	
50 mm	✓		✓	✓	✓	

Treadmill mat

IS-2000/3000/
5000/7000 series



Indiana treadmill mat can be supplied in different sizes and thickness to fit your applications for spinning, treadmill, cross trainer and so on, giving good protection for your floors and allowing for differences in floor and equipment balance levels.

Features & Benefits
– Anti-slip – Sound & shock absorbent – Protection for floor and machine
Specifications
Material: PU binder, Recycled rubber & Synthetic EPDM Color: IS–2000/3000/5000/7000 series Thickness: 2.5~10mm Size: 2m*1m, or customized sizes

Roll out ladder

IS-2021



The Roll Out Ladder is perfect for indoor speed and agility training. Made of heavy-duty, durable recycled rubber, it easily unrolls and lies flat, then rolls up for convenient transportation and storage.

Features & Benefits
– Durable – Anti-slip – Quickly unrolls and lies flat – Portable
Specifications
Material: PU binder, Recycled rubber & Recycled EPDM Color: Mixed color (BS–2021) Thickness: 3mm or customized Size: 4540mm*410mm

Available Test Certificates

(For gym and sports flooring)
Please contact us for further information.

Physical Performance Testing		
Test	Test Method	Report No.
Tensile strength Tear strength	ASTM D412-06a(2013) Method A ASTM D624-00(2012)	GZCCM131000781-01 (for BS-1000 series)
Shore hardness Tensile strength Tear strength Compression set Static coefficient of friction Relative volume loss	ASTM D2240-05(2010) ASTM D412-06a(2013) Method A ASTM D624-00(2012) ASTM D395-03(2008) Method B ASTM D2047-11 ASTM D5963-04(2010) Method A	GZCCM131000781-03 (for BS-2000 series) GZCCM131000781-05 (for BS-3000 series) GZCCM131000781-07 (for BS-5000 series) GZCCM131000781-09 (for BS-7000 series) GZCCM131000781-11 (for BS-8000 series)
Chemical Performance Testing		
Test	Test Method	Report No.
SVHC	SGS-In-House method GZTC CHEM-TOP-092-01 GZTC CHEM-TOP-092-02	CANMLC1406943901
RoHS Directive 2011/65/EU	IEC 62321：2008，ICP-OES IEC 62321：2008，UV-Vis IEC 62321：2008，GC-MS	GZ1107098567/CHEM
PAHs	ZEK 01.4-08 of German ZLS	CANMLC1406941701
PAHs	ZEK 01.4-08 of German ZLS	CANMLC1406942401
PAHs	ZEK 01.4-08 of German ZLS	CANMLC1406943001
Elementary Analysis	US EPA Method 3052:1996	CANMLC1406943601
Safety Data Sheet (SDS)	1907/2006/EC, 1272/2008/EC	CANMLC1408353001
VOCs	ISO 16000-9:2006 (ASTM D5116-97)	CANMLC1317228501
VOCs	ISO 16000-9:2006 (ASTM D5116-97)	CANMLC1317228503
Determination of Benzene, Toluene,Xylene content	With reference of SGS in-house method Weight 2.0g sample to headspace bottle,then heat 1hr at 100° C in headspace instrument	GZ1107098565/CHEM
Flammability Properties Testing		
Test	Test Method	Report No.
NF P 92-507:2004 Fire safety-building-interior fitting materials	NF P 92-501:1995	GZCCM140500496
EN 13501-1:2007+A1:2009 Fire classification of construction products and building elements	EN ISO 11925-2:2010 Reaction to fire test	GZCCM40500498
16 CFR 1630 Standard for the surface flammability of Carpets and Rugs (FF 1-70)		GZMR110716819



Color Range

IS-1000/2000/3000 series


Endless color combinations

Our rubber flooring is a combination of design and high walking comfort to meet the challenges of commercial and athletic environments. With various colors to choose from, you can design your own fitness floor, sports floor and set yourself apart from the competition. For further assistance, please contact our sales team .

IS-1000 series



IS-2000 series

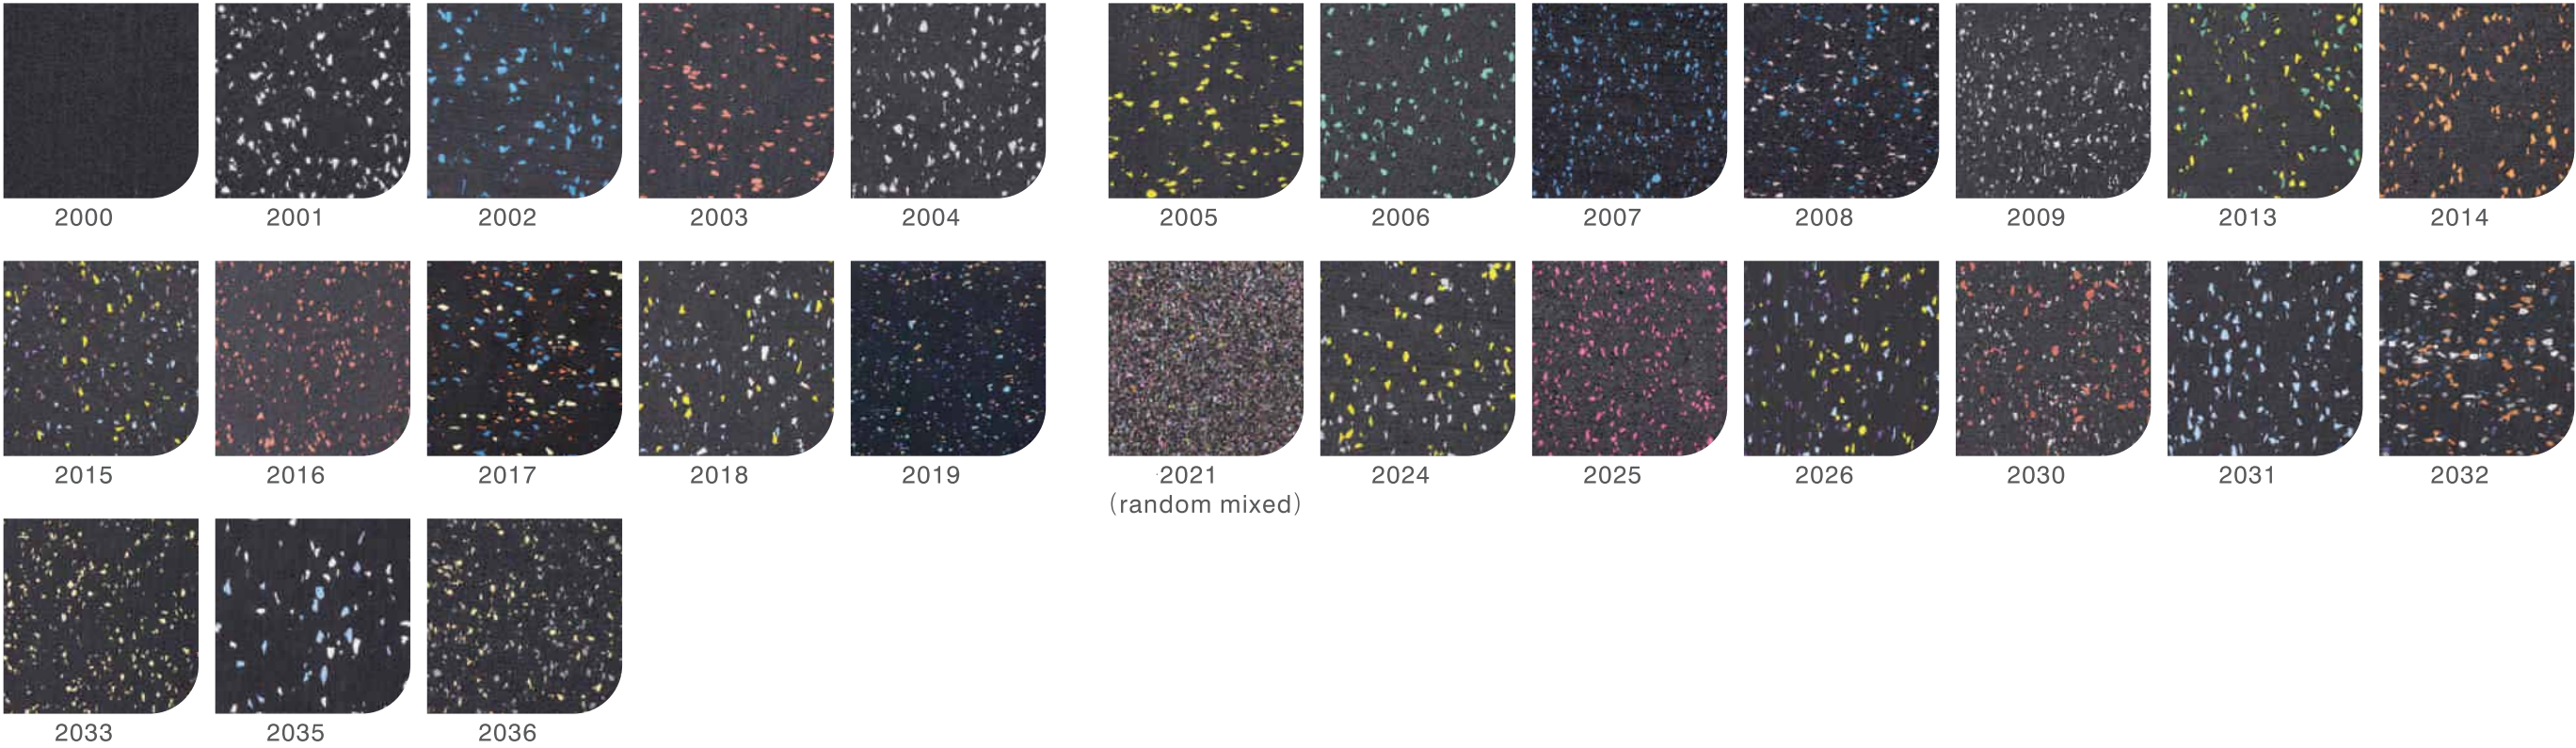

IS-3000 series




IS-1000/2000/
3000 series

Color Range


Color Range

IS-5000/7000/8000 series


IS-5000 series

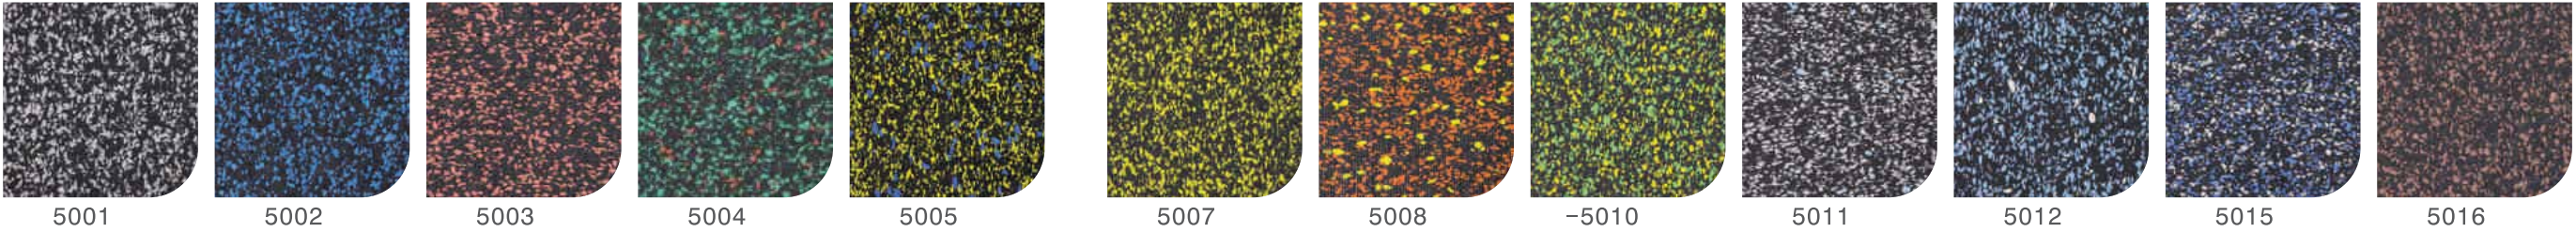


IS-7000 series

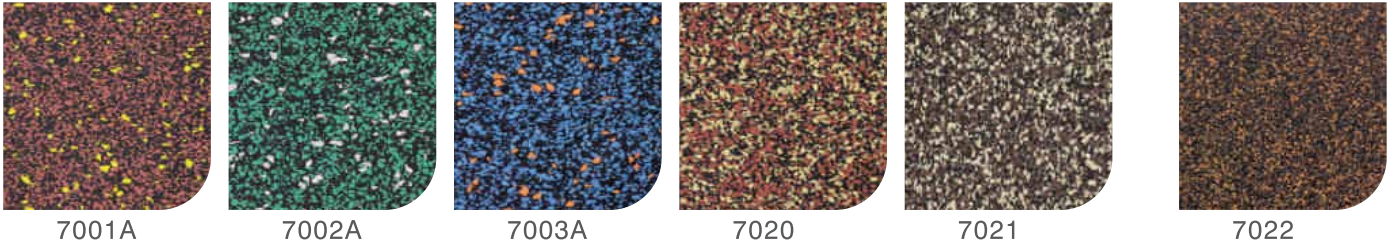

IS-8000 series

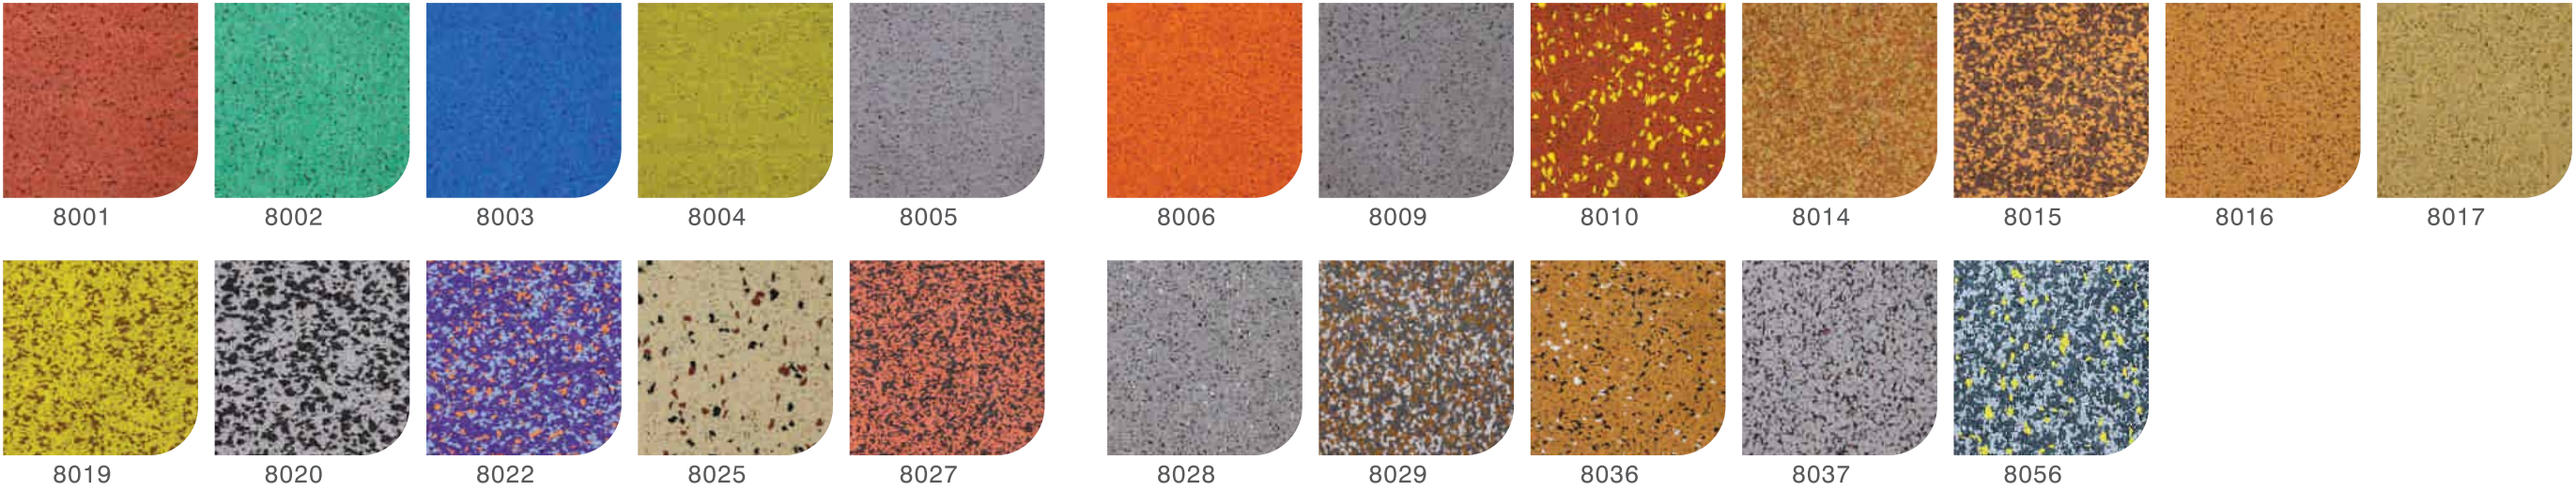

EPDM Color%

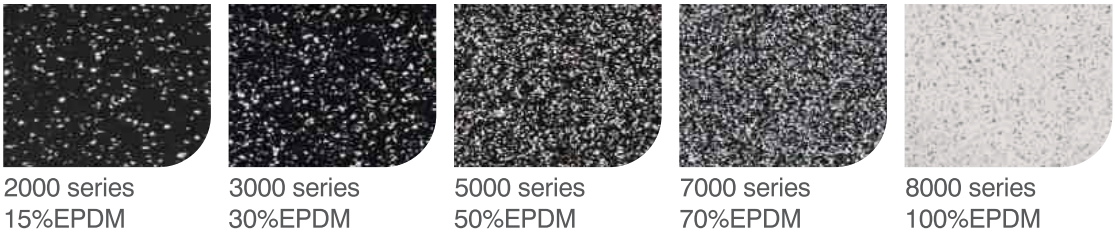

IS-5000/7000/8000 series

Color Range